


Tyne Ridger

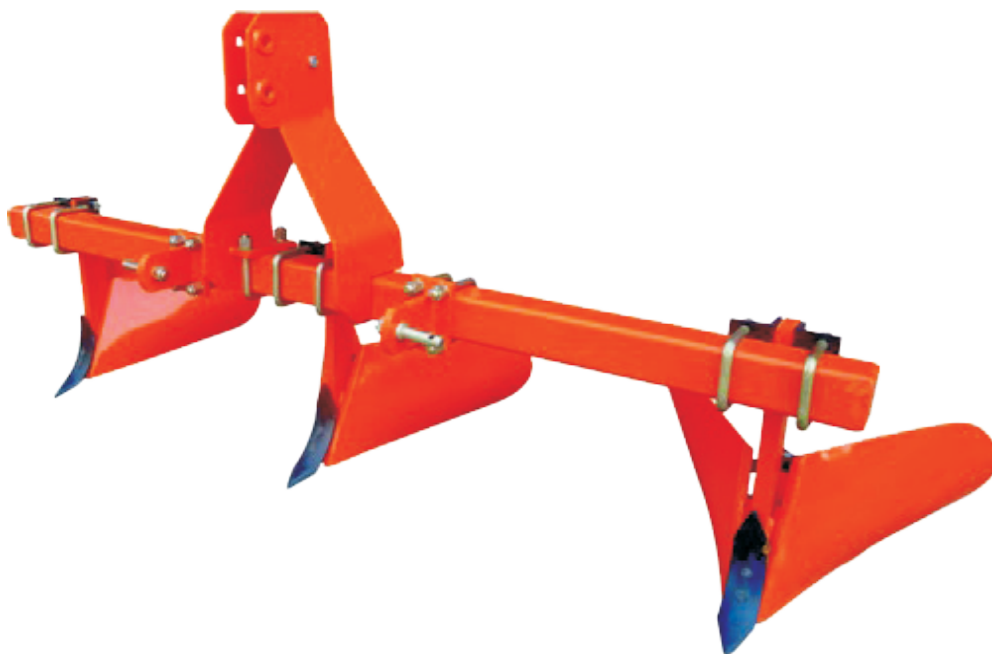

Features & Benefits

- ◆ UNIVERSAL Tyne Ridgers quickly and economically make simple soil ridges.
- ◆ The furrows can be easily spaced (widened or narrowed) as per the crop requirement.
- ◆ The wings angle can be changed as per requirement.
- ◆ These are mostly used for making ridges for plantation of vegetables, sugarcane & for similar purposes.
- ◆ Heavy duty pipe box type frame capable of operating in tough soil conditions.
- ◆ Depth of the Ridger could be adjusted with the side tires.
- ◆ Available sizes are in 2, 3 and 4 furrow, with and without tire facility.

| DESCRIPTION | BETR-3 | BETR-4 |
|---|----------------------|--------------|
| FRAME (mm) | Heavy duty box frame | |
| MAST HEIGHT | 21" (533mm) | |
| OVERALL LENGTH (Inch/mm) | 109" (2768mm) | 145"(3683mm) |
| 3 POINT LINKAGE | CAT - II | |
| FASTENERS | High Tensile | |
| NO. OF TYRE(optional) | 2 | |
| WEIGHT WITH TYRES (Kg.) | 330 (approx) | 400 (approx) |
| POWER REQUIRED (HP) | 40~50 | 50~65 |
| *The weight and working data contained here are supplied for information only and are not binding. Specification and size can be altered as part of ongoing product modification / improvement. | | |